



ATIS 132.375	ROANOKE Approach (R) 126.9	ROANOKE Tower 118.3	Ground 121.9
WAAS Ch 99522 W-24A	Final Apch Crs 238°	Minimum Alt HIBAN 3700' (2530')	LP MDA(H) 2500' (1330')
Apt Elev 1175' TDZE 1170'			5700
MISSED APCH: Climbing LEFT turn to 4000' direct MONAT and hold.			
Alt Set: INCHES Trans level: FL 180 Trans alt: 18000'			
1. DME/DME RNP-0.30 not authorized. 2. Helicopter visibility reduction below 3/4 SM not authorized. 3. Cold temperature altitude correction required at or below -13°C (9°F).			
			MSA RW24

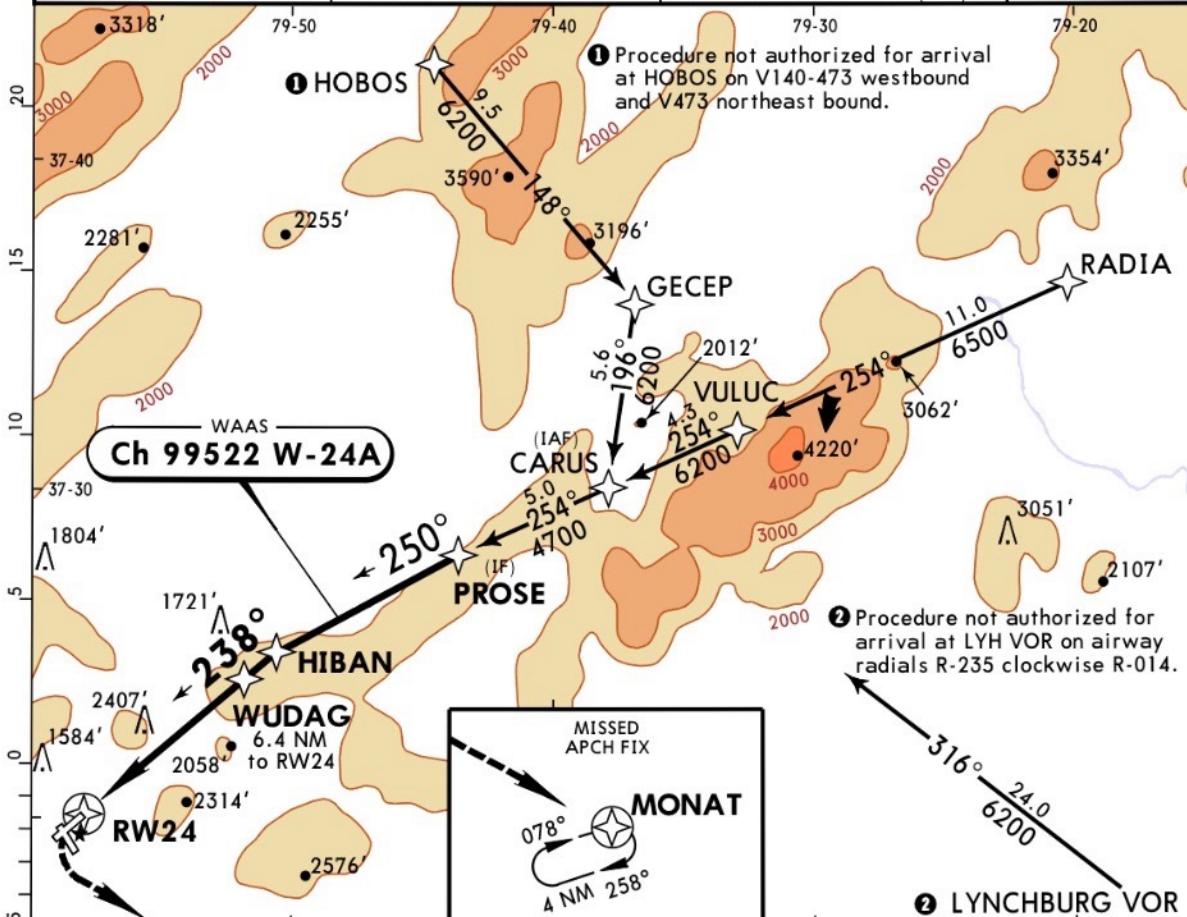

Visual segment - obstacles.
34:1 is not clear.

Not for Navigational Purposes

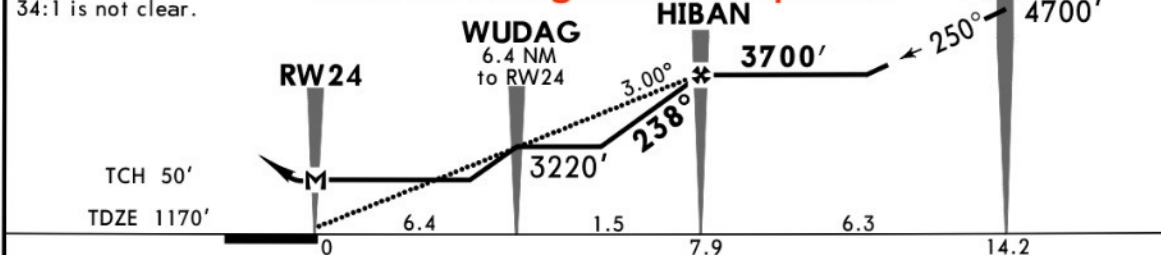

Gnd speed-Kts	70	90	100	120	140	160	REIL	4000'	MONAT
Descent Angle 3.00°	372	478	531	637	743	849	PAPI-L	LT	
MAP at RW24									

TERPS STRAIGHT-IN LANDING RWY 24				CIRCLE-TO-LAND	
LP		LNAV		Not Authorized Northwest of Rwy 6-24	
MDA(H) 2500' (1330')		MDA(H) 3000' (1830')		Max Kts	MDA(H)
A	1 1/4	1 1/4	1 1/4	90	3000' (1825') - 1 1/4
B	1 1/2	1 1/2	1 1/2	120	3000' (1825') - 1 1/2
C	3	3	3	140	3000' (1825') - 3
D				165	