

CSS

CSS FUNDAMENTALS

Reset styles



IN A ROCKET

Learn front-end development at *rocket speed*

USER AGENT STYLESHEETS


All browsers apply a set of default styles in what is called the “user agent stylesheet”.

Chromium UA stylesheet


Mozilla UA stylesheet

WebKit UA stylesheet

Best practice: use a CSS to normalize different styles applied by the browsers and start your work from that point.

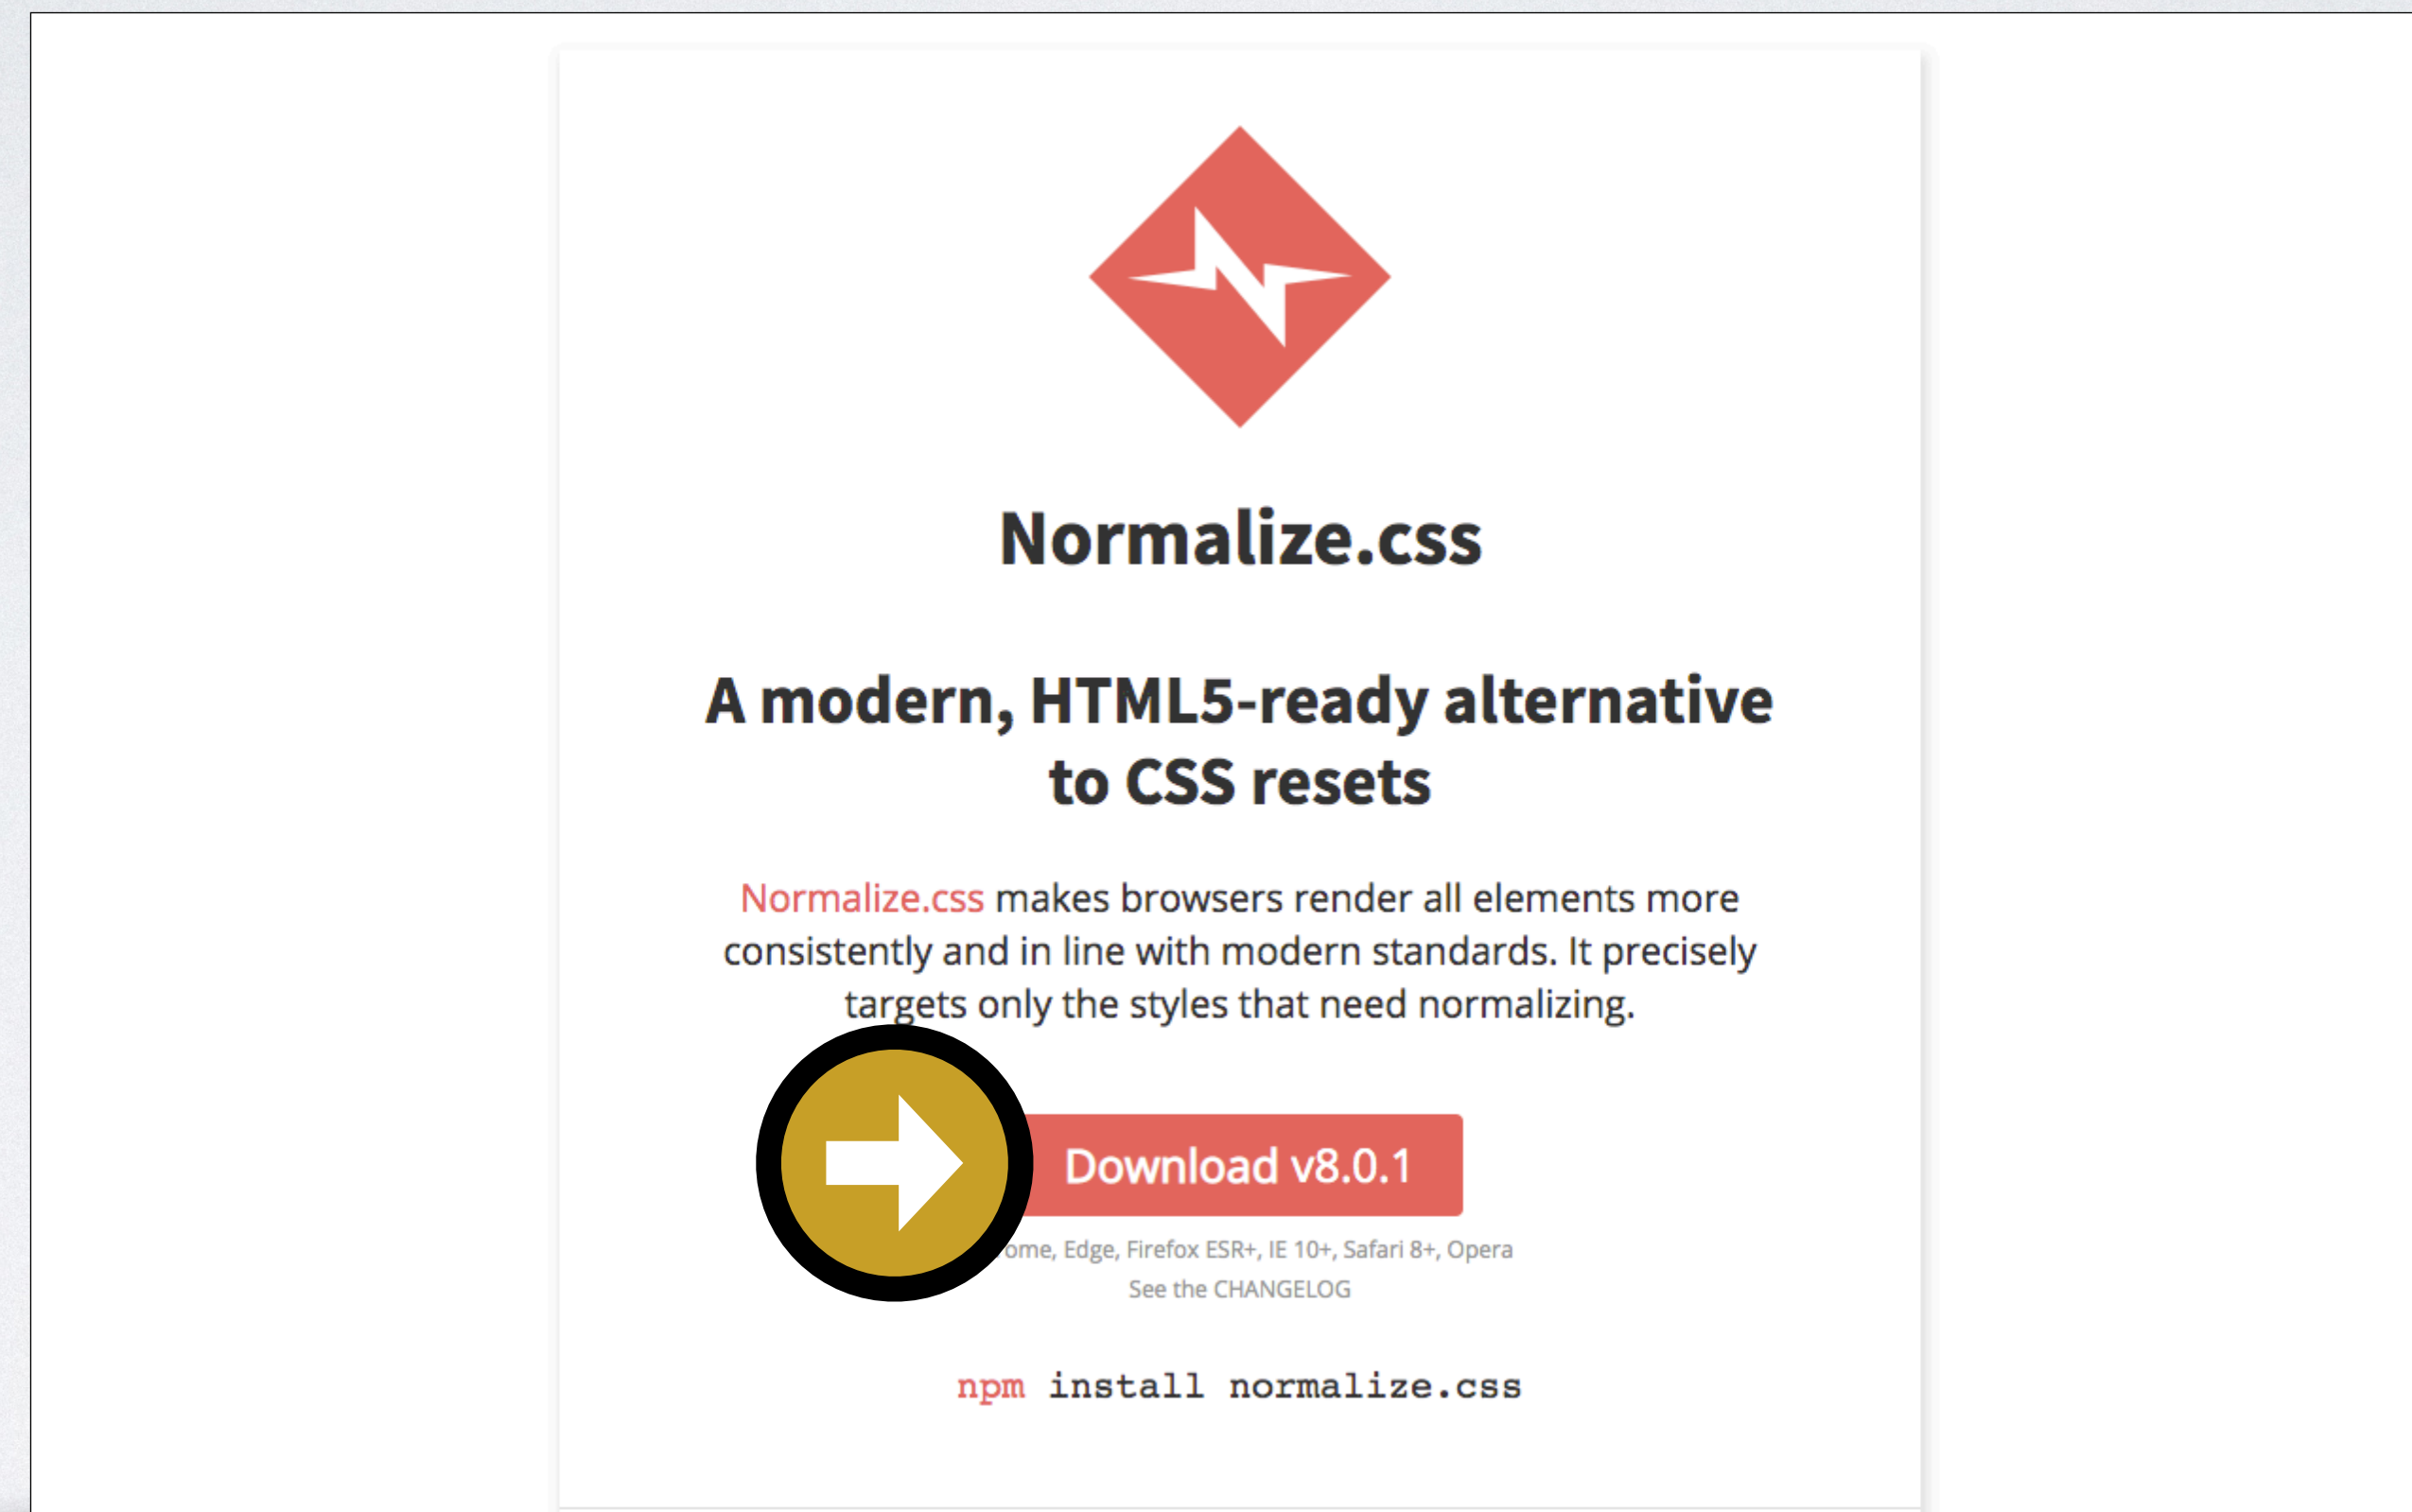

TOOLS: NORMALIZE

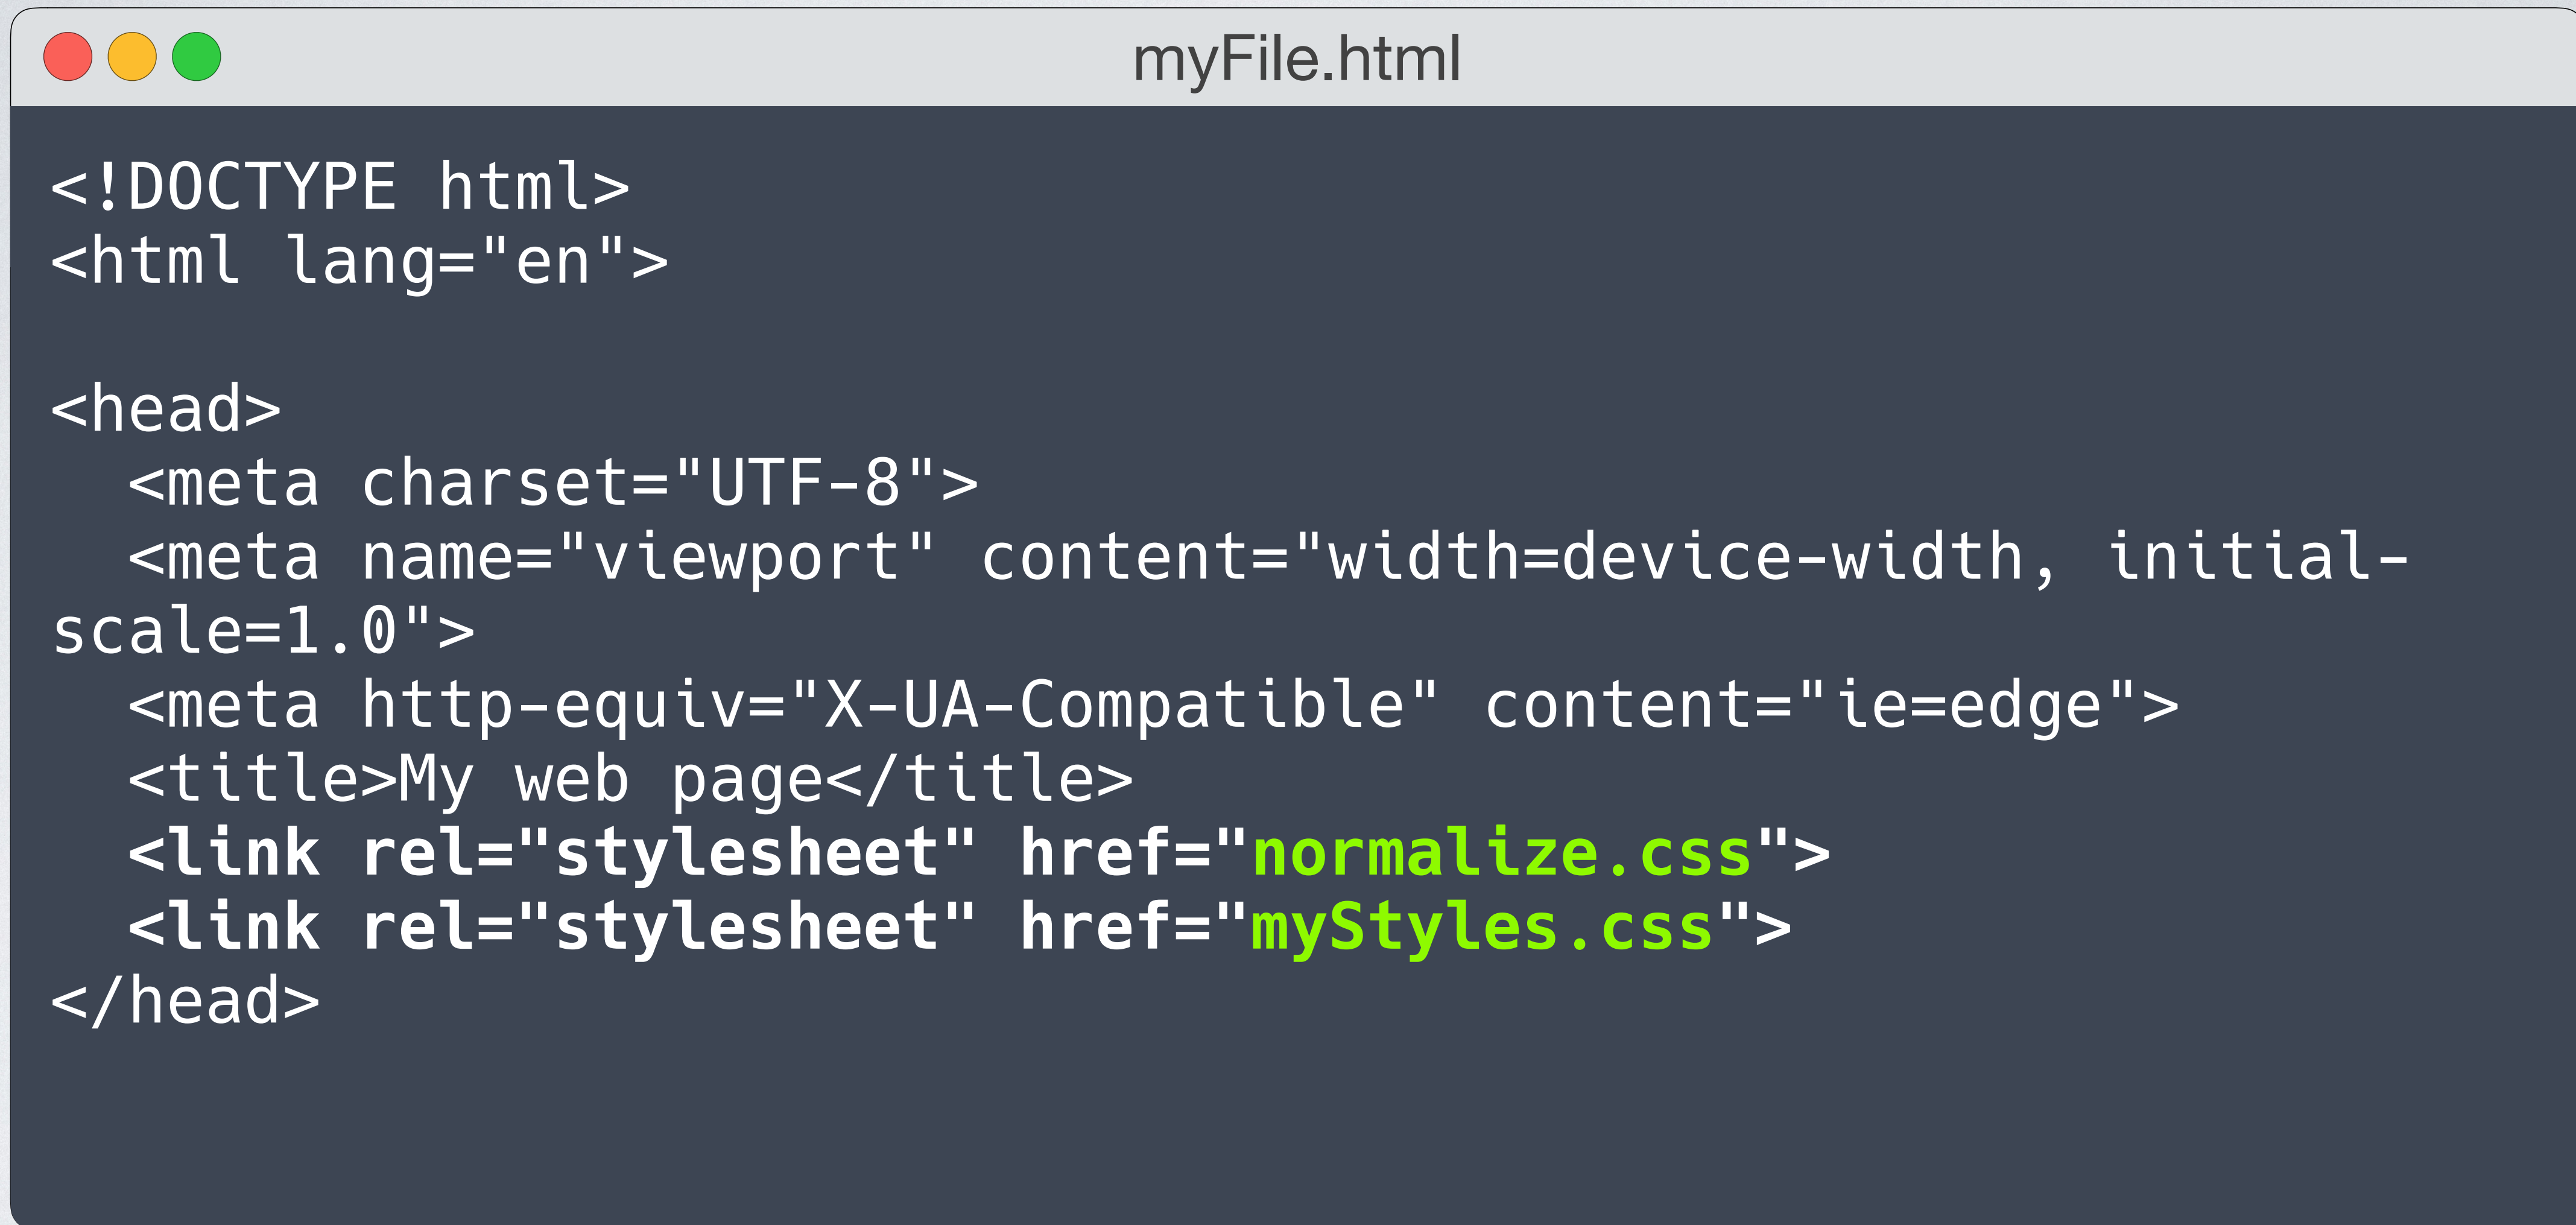

```
<!DOCTYPE html>
<html lang="en">

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <meta http-equiv="X-UA-Compatible" content="ie=edge">
  <title>My web page</title>
  <link rel="stylesheet" href="normalize.css">
  <link rel="stylesheet" href="myStyles.css">
</head>
```


TOOLS: REBOOT BY BOOTSTRAP

B

Home Documentation Examples Themes Expo Blog

v4.3

Download

Search...

Getting started

Layout

Content

Reboot

Typography

Code

Images

Tables

Figures

Components

Utilities

Extend

Migration

About

Reboot

Reboot, a collection of element-specific CSS changes in a single file, kickstart Bootstrap to provide an elegant, consistent, and simple baseline to build upon.

Approach

Reboot builds upon Normalize, providing many HTML elements with somewhat opinionated styles using only element selectors. Additional styling is done only with classes. For example, we reboot some `<table>` styles for a simpler baseline and later provide `.table`, `.table-bordered`, and more.

Here are our guidelines and reasons for choosing what to override in Reboot:

- Update some browser default values to use `rem`s instead of `em`s for scalable component spacing.
- Avoid `margin-top`. Vertical margins can collapse, yielding unexpected results. More importantly though, a single direction of `margin` is a simpler mental model.
- For easier scaling across device sizes, block elements should use `rem`s for `margins`.
- Keep declarations of `font`-related properties to a minimum, using `inherit` whenever possible.

Page defaults

Approach

Page defaults

Native font stack

Headings and paragraphs

Lists

Preformatted text

Tables

Forms

Misc elements


Address

Blockquote




Inline elements

Summary

HTML5 [hidden] attribute



TEMPLATES: RESET CSS FOR E-MAILS

 / Email Design Reference

Development / CSS

Reset Styles

Just as in traditional web development, it's a good idea to provide some reset CSS to the emails you build. For the same reason it's done when building a site, adding a reset to an email helps to normalize how the code gets rendered across multiple email clients. The email templates provided by this reference rely on the following reset:

```
<style type="text/css">
  /* /\ /\ /\ /\ /\ /\ /\ /\ RESET STYLES /\ /\ /\ /\ /\ /\ /\ /\ */
  body{
    margin:0;
    padding:0;
  }

  img{
    border:0 none;
    height:auto;
    line-height:100%;
    outline:none;
    text-decoration:none;
  }

  a img{
    border:0 none;
  }

  .imageFix{
    display:block;
```


YOU CAN CONTINUE THIS COURSE FOR FREE ON


inrocket.com

Learn front-end development at *rocket speed*

+ READY TO USE CODE

+ QUIZZES


+ FREE UPDATES



by miguelsanchez.com

inrocket.com

Learn front-end development at *rocket speed*

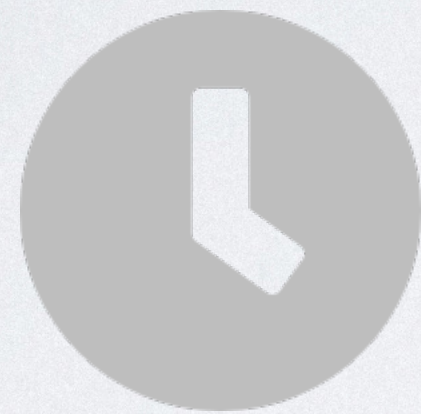


We respect your time

No more blah blah videos. Just straight to the point slides with relevant information.



Step by step guides

Clear and concise steps to build real use solutions. No missed points.

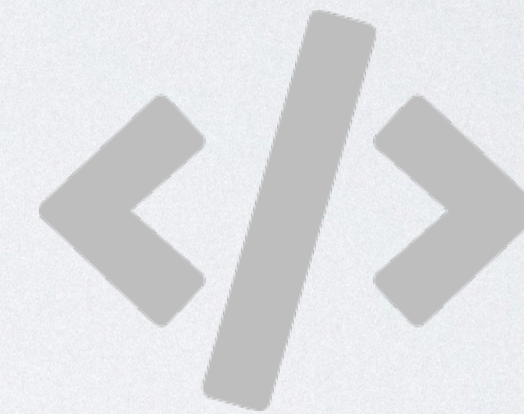

Ready to use code

Real code you can just copy and paste into your real projects.

CSS

CSS FUNDAMENTALS

Reset styles



IN A ROCKET

Learn front-end development at *rocket speed*